





ENERG Y IJA
енергия · ενεργεια IE IA

10082241


ALPHA INNOTEC WZSV 63H1/3M



A+++



A

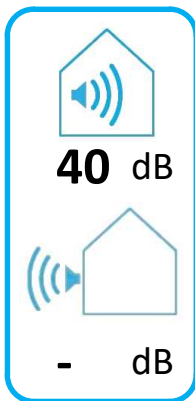

2019

811/2013



ENERG

енергия · ενεργεια



10082241

alpha innotec WZSV 63H1/3M + Luxtronik 2.1

Energy label for heating system showing a boiler icon, a radiator icon, and a tap icon with 'M'. The label features two black arrow-shaped boxes: the top one contains 'A+++', and the bottom one contains 'A'.

Energy scale for heating system with a radiator icon at the top. The scale consists of horizontal bars of varying lengths and colors, labeled from A+++ (green) to G (red). A black arrow-shaped box on the right points to the A+++ level.

Energy label for water heating and controls. It features four rows, each with a plus sign, an icon, and a box:

- Row 1: Solar panel icon, empty box
- Row 2: Water tank icon, empty box
- Row 3: Control panel icon, box containing 'X'
- Row 4: Boiler icon, empty box

Energy scale for water heating and controls with a tap icon and 'M' at the top. The scale consists of horizontal bars of varying lengths and colors, labeled from A+++ (green) to G (red). A black arrow-shaped box on the right points to the 'A' level.

Verbundanlage (Wärmepumpen und Kombiheizgeräte mit Wärmepumpe) - WZSV 63H1/3M + Luxtronik 2.1

Jahreszeitbedingte Raumheizungs-Energieeffizienz der Wärmepumpe (η_s) ① 150 %

Nennleistung der Wärmepumpe (Prated kW) 5

Temperaturregler Klasse VII (Tabelle 1) ② 2,0 %

Zusatzheizkessel Paket mit Speicher nein Psup kW (Nennleistung des Zusatzkessels)

η_s % (sup) ③
 $(\eta_s \text{ % (sup)} - ①) \times (\alpha_{WP}) = -$


(α_{WE} : siehe auch Tabelle 3) (α_{WE})

solarer Beitrag (A_{Koll} m²) (η_{Koll} %)
 (V_{Sp} m³) (Standverlust des Speichers in W)
 (η_{Sp} : Tabelle 2)

$((294/P_{rated} \times 11) \times (A_{Koll} \text{ m}^2) + (115/P_{rated} \times 11) \times (V_{Sp} \text{ m}^3)) \times 0,45 \times ((\eta_{Koll} \text{ %}) / 100) \times (\eta_{Sp}) = +$ ④

Jahreszeitbedingte Raumheizungs-Energieeffizienz der Verbundanlage ⑤ 152 %
auf ganze Zahl gerundet

Jahreszeitbedingte Raumheizungs-Energieeffizienzklasse der Verbundanlage

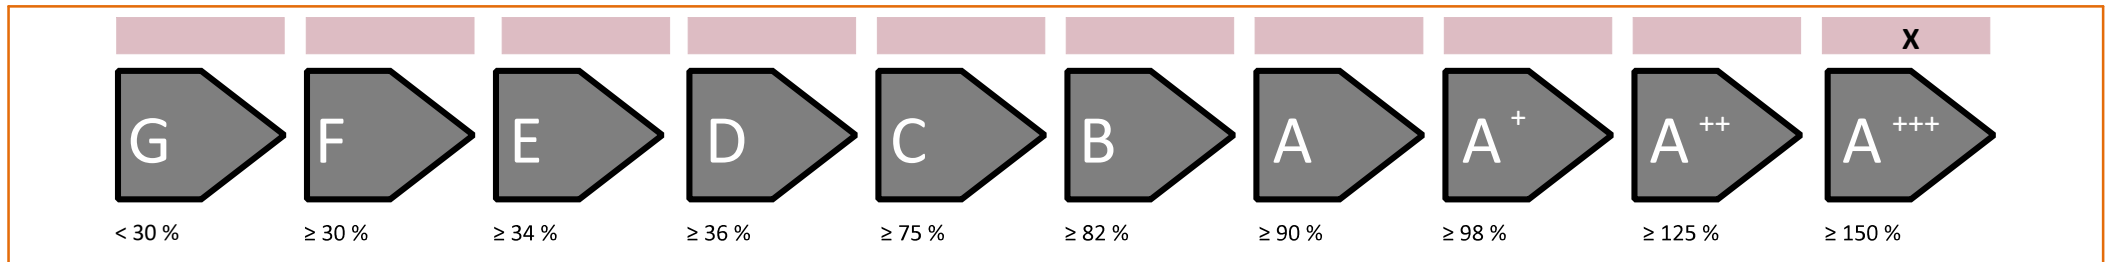

Jahreszeitbedingte Raumheizungs-Energieeffizienz bei kälterem und wärmerem Klima

Jahreszeitbedingte Raumheizungs-Energieeffizienz der Wärmepumpe (η_s) bei kälterem Klima 145 %

Jahreszeitbedingte Raumheizungs-Energieeffizienz der Wärmepumpe (η_s) bei wärmerem Klima 140 %

kälter ⑤ 152 -V 5 = 147 wärmer ⑤ 152 +VI -11 = 141

technische Daten der Wärmepumpe:			
Hersteller	alpha innotec		
Modell	WZSV 63H1/3M		
Angaben zur Energieeffizienzklasse und der Nennleistung:			
Lastprofil Warmwasser	M		
	average / low	average / medium	
Energieeffizienzklasse Raumheizung	A+++	A+++	
Energieeffizienzklasse Brauchwasserbereitung	A		
Wärmenennleistung	6	5	kW
jährlicher Endenergieverbrauch Raumheizung	2409	2610	kWh
jährlicher Stromverbrauch Brauchwasser	642		kWh
Energieeffizienz Raumheizung	198	150	%
Energieeffizienz Brauchwasser	80		%
Schalleistungspegel in Innenräumen			
	40		dB
Besondere Vorkehrungen bei Zusammenbau, Installation oder Wartung:			
Alle anleitenden Arbeiten der Betriebsanleitung dürfen ausschließlich durch qualifiziertes Fachpersonal unter Berücksichtigung der lokalen Vorschriften durchgeführt werden.			
Zusätzliche Angaben:			
	low	medium	
Wärmenennleistung kälteres Klima	6	5	kW
Wärmenennleistung wärmeres Klima	6	5	kW
jährlicher Energieverbrauch Raumheizung kälteres Klima	2803	3217	kWh
jährlicher Energieverbrauch Raumheizung wärmeres Klima	1630	1810	kWh
jährlicher Stromverbrauch Brauchwasser kälteres Klima	642		kWh
jährlicher Stromverbrauch Brauchwasser wärmeres Klima	642		kWh
Energieeffizienz Raumheizung kälteres Klima	203	145	%
Energieeffizienz Raumheizung wärmeres Klima	189	140	%
Energieeffizienz Brauchwasser kälteres Klima	80		%
Energieeffizienz Brauchwasser wärmeres Klima	80		%
Schalleistungspegel im Außenbereich			
	-		dB

Technische Daten des Temperaturreglers:		
Hersteller	alpha innotec	
Modell	Luxtronik 2.1	
Klasse des Reglers	VII	-
Beitrag des Reglers zur Raumheizungs - Energieeffizienz	2,0	%

Modell	WZSV 63H1/3M						
Luft-Wasser-Wärmepumpe: (ja/nein)	no						
Sole-Wasser-Wärmepumpe: (ja/nein)	yes						
Wasser-Wasser Wärmepumpe: (ja/nein)	no						
Niedertemperatur-Wärmepumpe: (ja/nein)	no						
Mit Zusatzheizgerät: (ja/nein)	yes						
Kombiheizgerät mit Wärmepumpe: (ja/nein)	yes						
Anwendung: (low/medium)	medium						
Klima: (colder/average/warmer)	average						
Angabe	Symbol	Wert	Einheit	Angabe	Symbol	Wert	Einheit
Wärmenennleistung (*)	Prated	5	kW	Jahreszeitbedingte Raumheizungs-Energieeffizienz	η_s	150,3	%
Angegebene Leistung für Teillast bei Raumlufttemperatur 20°C und Außentemperatur Tj				Angegebene Leistung für Teillast bei Raumlufttemperatur 20°C und Außentemperatur Tj			
Tj = -7°C	Pdh	4,5	kW	Tj = -7°C	COPd	3,04	-
Tj = +2°C	Pdh	2,7	kW	Tj = +2°C	COPd	4,01	-
Tj = +7°C	Pdh	1,8	kW	Tj = +7°C	COPd	4,57	-
Tj = +12°C	Pdh	0,9	kW	Tj = +12°C	COPd	4,83	-
Tj = Bivalenztemperatur	Pdh	5,1	kW	Tj = Bivalenztemperatur	COPd	2,75	-
Tj = Betriebstemperaturgrenzwert	Pdh	5,1	kW	Tj = Betriebstemperaturgrenzwert	COPd	2,75	-
Für Luft-Wasser-Wärmepumpen: Tj = +15°C (wenn TOL < -20°C)	Pdh		kW	Für Luft-Wasser-Wärmepumpen: Tj = +15°C (wenn TOL < -20°C)	COPd		-
Bivalenztemperatur	T _{biv}	-10,0	°C	Für Luft-Wasser-Wärmepumpen: Betriebsgrenzwert-temperatur	TOL	-10,00	°C
Leistung bei zyklischem Intervall-Heizbetrieb	P _{cyh}		kW	Leistungszahl bei zyklischem Intervall-Heizbetrieb	COP _{cyh}		-
Minderungsfaktor (**)	Cdh	1,0	-	Grenzwert Betriebstemperatur Heizwasser	WTOL	70,00	°C
Stromverbrauch in anderen Betriebsarten als dem Betriebszustand				Zusatzheizgerät			
Aus-Zustand	P _{OFF}	0,009	kW	Wärmenennleistung	P _{sup}	0	kW
Thermostat-aus-Zustand	P _{TO}	0,008	kW	Art der Energiezufuhr	elektrisch		
Bereitschaftszustand	P _{SB}	0,008	kW				
Betriebszustand mit Kurbelgehäuseheizung	P _{CK}	0,000	kW				
sonstige Elemente				Für Luft-Wasser-Wärmepumpen: Nenn-Luftdurchsatz, außen			
Leistungssteuerung	veränderlich			Für Wasser/Sole-Wasser-Wärmepumpen: Wasser- oder Sole-Nenndurchsatz			
Schalleistungspegel innen/außen	L _{WA}	40/-	dB	1 m³/h			
Stickoxidausstoß	NO _x	-	mg/kWh				
Kombiheizgerät mit Wärmepumpe:				Für Luft-Wasser-Wärmepumpen: Nenn-Luftdurchsatz, außen			
Angegebenes Lastprofil	M			Warmwasserbereitungs- Energieeffizienz	η_{wh}	80	%
Täglicher Stromverbrauch	Q _{elec}	3,078	kWh	Täglicher Brennstoffverbrauch	Q _{fuel}	0	kWh
Kontakt:				ait deutschland GmbH Industriestr. 3 95359 Kasendorf Germany			
(*) Für Heizgeräte und Kombiheizgeräte mit Wärmepumpe ist die Wärmenennleistung Prated gleich der Auslegungslast im Heizbetrieb Pdesignh und die Wärmenennleistung eines Zusatzheizgerätes Psup gleich der zusätzlichen Heizleistung sup(Tj).							
(**) Wird der Cdh-Wert nicht durch Messung bestimmt, gilt für den Minderungsfaktor Cdh der Vorgabewert Cdh = 0,9.							

Modell	WZSV 63H1/3M		
Luft-Wasser-Wärmepumpe: (ja/nein)	no		
Sole-Wasser-Wärmepumpe: (ja/nein)	yes		
Wasser-Wasser Wärmepumpe: (ja/nein)	no		
Niedertemperatur-Wärmepumpe: (ja/nein)	no		
Mit Zusatzheizgerät: (ja/nein)	yes		
Kombiheizgerät mit Wärmepumpe: (ja/nein)	yes		
Anwendung: (low/medium)	low		
Klima: (colder/average/warmer)	average		
Angabe	Symbol	Wert	Einheit
Wärmenennleistung (*)	Prated	6	kW
Angegebene Leistung für Teillast bei Raumlufttemperatur 20°C und Außentemperatur Tj			
Tj = -7°C	Pdh	5,4	kW
Tj = +2°C	Pdh	3,3	kW
Tj = +7°C	Pdh	2,0	kW
Tj = +12°C	Pdh	1,0	kW
Tj = Bivalenztemperatur	Pdh	5,9	kW
Tj = Betriebstemperaturgrenzwert	Pdh	5,9	kW
Für Luft-Wasser-Wärmepumpen: Tj = +15°C (wenn TOL < -20°C)	Pdh		kW
Bivalenztemperatur	T biv	-10,0	°C
Leistung bei zyklischem Intervall-Heizbetrieb	Pcyh		kW
Minderungsfaktor (**)	Cdh	1,0	-
Stromverbrauch in anderen Betriebsarten als dem Betriebszustand			
Aus-Zustand	P _{OFF}	0,009	kW
Thermostat-aus-Zustand	P _{TO}	0,008	kW
Bereitschaftszustand	P _{SB}	0,008	kW
Betriebszustand mit Kurbelgehäuseheizung	P _{CK}	0,000	kW
sonstige Elemente			
Leistungssteuerung	veränderlich		
Schalleistungspegel innen/außen	L _{WA}	40/-	dB
Stickoxidausstoß	NO _x	-	mg/kWh
Kombiheizgerät mit Wärmepumpe:			
Angegebenes Lastprofil	-		
Täglicher Stromverbrauch	Q _{elec}		kWh
Angabe			
Jahreszeitbedingte Raumheizungs-Energieeffizienz	η _S	197,8	%
Angegebene Leistung für Teillast bei Raumlufttemperatur 20°C und Außentemperatur Tj			
Tj = -7°C	COPd	4,03	-
Tj = +2°C	COPd	5,20	-
Tj = +7°C	COPd	5,95	-
Tj = +12°C	COPd	6,04	-
Tj = Bivalenztemperatur	COPd	3,79	-
Tj = Betriebstemperaturgrenzwert	COPd	3,79	-
Für Luft-Wasser-Wärmepumpen: Tj = +15°C (wenn TOL < -20°C)	COPd		-
Für Luft-Wasser-Wärmepumpen: Betriebsgrenzwert-temperatur	TOL	-10,00	°C
Leistungszahl bei zyklischem Intervall-Heizbetrieb	COP _{cyh}		-
Grenzwert Betriebstemperatur Heizwasser	WTOL	70,00	°C
Zusatzheizgerät			
Wärmenennleistung	P _{sup}	0	kW
Art der Energiezufuhr	elektrisch		
Für Luft-Wasser-Wärmepumpen: Nenn-Luftdurchsatz, außen			
Für Wasser/Sole-Wasser-Wärmepumpen: Wasser- oder Sole-Nenndurchsatz			
		1	m ³ /h
Wärmewasserbereitungs- Energieeffizienz			
		η _{wh}	- %
Täglicher Brennstoffverbrauch			
		Q _{fuel}	- kWh
Kontakt: ait deutschland GmbH Industriestr. 3 95359 Kasendorf Germany			

(*) Für Heizgeräte und Kombiheizgeräte mit Wärmepumpe ist die Wärmenennleistung Prated gleich der Auslegungslast im Heizbetrieb Pdesignh und die Wärmenennleistung eines Zusatzheizgerätes Psup gleich der zusätzlichen Heizleistung sup(Tj).



(**) Wird der Cdh-Wert nicht durch Messung bestimmt, gilt für den Minderungsfaktor Cdh der Vorgabewert Cdh = 0,9.




ENERG Y IJA
енергия · ενεργεια IE IA

10082241


ALPHA INNOTEC WZSV 63H1/3M



A+++



A

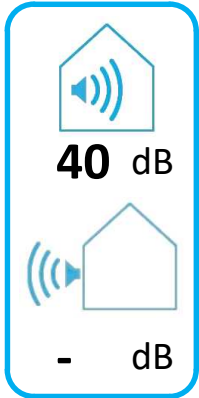





ENERGY

10082241


ALPHA INNOTEC WZSV 63H1/3M



A+++



A

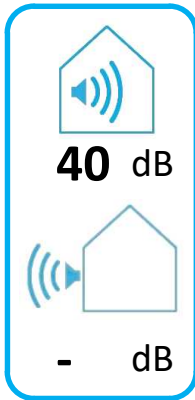

2019

811/2013



ENERG

енергия · ενεργεια



10082241

alpha innotec WZSV 63H1/3M + Luxtronik 2.1

Energy label for heating system showing a boiler icon, a radiator icon, and a tap icon with 'L'. The label features two black arrow-shaped boxes: the top one contains 'A+++', and the bottom one contains 'A'.

Energy scale for heating system with a radiator icon at the top. The scale consists of horizontal bars of varying lengths, colored from green (A+++) to red (G). A black arrow-shaped box on the right points to the A+++ level.

Energy label for energy efficiency showing four categories: solar panels, hot water tank, touch control, and boiler. Each category has a plus sign, an icon, and a square box. The touch control box contains an 'X'.

Energy scale for energy efficiency with a tap icon and 'L' at the top. The scale consists of horizontal bars of varying lengths, colored from green (A+++) to red (G). A black arrow-shaped box on the right points to the A level.

package (heat pumps and combination heater with heat pump) - WZSV 63H1/3M + Luxtronik 2.1

Seasonal space heating energy efficiency of heat pump (η_s)

① 150 %

Rated heat output of the heat pump (Prated kW)

5

Temperature control

Class

VII

(Table 1)

② 2,0 %

Supplementary boiler

package with hot water storage tank

no

Psup kW (rated heat output of supplementary heater)

η_s % (sup)

$(\eta_s \% (\text{sup}) - ①) \times (\alpha_{WP}) = -$ ③ %

(α_{WE} : see Table 3)

(α_{WE})

solar contribution

(A_{Koll} m²)

(η_{Koll} %)

(V_{Sp} m³)

(standstill heat loss of the hot water storage tank in W)

(η_{Sp} : Table 2)


$((294/P_{\text{rated}} \times 11) \times (A_{Koll} \text{ m}^2) + (115/P_{\text{rated}} \times 11) \times (V_{Sp} \text{ m}^3)) \times 0,45 \times ((\eta_{Koll} \%) / 100) \times (\eta_{Sp}) = +$ ④ %

Seasonal space heating energy efficiency of package

⑤ 152 %

rounded to the nearest integer

Seasonal space heating energy efficiency class of package

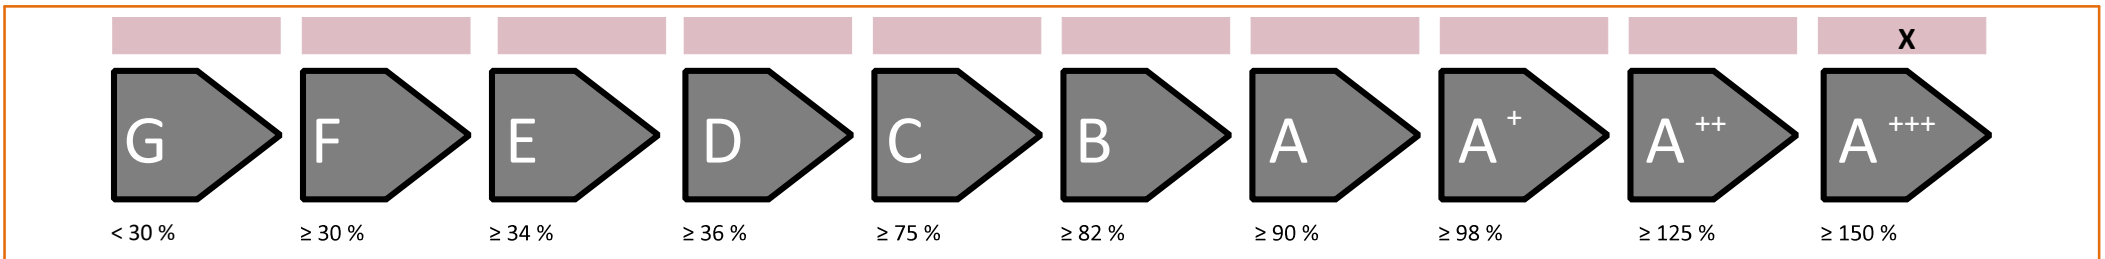

Seasonal space heating energy efficiency under colder or warmer climate conditions

Seasonal space heating energy efficiency of the heat pump (η_s) under colder climate conditions

145 %

Seasonal space heating energy efficiency of the heat pump (η_s) under warmer climate conditions

140 %

colder ⑤ 152 -V 5 = 147

warmer ⑤ 152 +VI -11 = 141

heatpump datasheet:			
manufacturer:	alpha innotec		
model:	WZSV 63H1/3M		
Information concerning energy efficiency class and rated heat output:			
load profile water heating	L		
	average / low	average / medium	
energy efficiency class space heater:	A+++	A+++	
energy efficiency class water heating	A		
rated heat output:	6	5	kW
annual final energy consumption space heater	2409	2610	kWh
annual electricity consumption water heating	1016		kWh
energy efficiency space heater:	198	150	%
energy efficiency water heating	101		%
sound power level indoors	40		dB
special precautions concerning assembly, installation or maintenance			
All instructional work in this manual may only be carried out by qualified specialist personnel in compliance with local regulations.			
additional information	low	medium	
rated heat output under colder climate conditions	6	5	kW
rated heat output under warmer climate conditions	6	5	kW
annual energy consumption space heater under colder climate conditions	2803	3217	kWh
annual energy consumption space heater under warmer climate conditions	1630	1810	kWh
annual electricity consumption water heating under colder climate conditions	1016		kWh
annual electricity consumption water heating under warmer climate conditions	1016		kWh
energy efficiency space heater under colder climate conditions	203	145	%
energy efficiency space heater under warmer climate conditions	189	140	%
energy efficiency water heating under colder climate conditions	101		%
energy efficiency water heating under warmer climate conditions	101		%
sound power level outdoors	-		dB

technical data of the temperature controller		
manufacturer:	alpha innotec	
model:	Luxtronik 2.1	
controller class	VII	-
contribution of the controller to the energy efficiency space heater	2,0	%

Model	WZSV 63H1/3M
Air-to-water heat pump: (yes/no)	no
Brine-to-water heat pump: (yes/no)	yes
Water-to-water heat pump: (yes/no)	no
Low-temperature heat pump: (yes/no)	no
Equipped with supplementary heater: (yes/no)	yes
combination heater with	yes
application: (low/medium)	medium
climate: (colder/average/warmer)	average

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output	Prated	5	kW	Seasonal space heating energy efficiency	η_s	150,3	%
Declared coefficient of performance for part load at indoor temperature 20°C and outdoor temperature Tj				Declared coefficient of performance for part load at indoor temperature 20°C and outdoor temperature Tj			
Tj = -7°C	Pdh	4,5	kW	Tj = -7°C	COPd	3,04	-
Tj = +2°C	Pdh	2,7	kW	Tj = +2°C	COPd	4,01	-
Tj = +7°C	Pdh	1,8	kW	Tj = +7°C	COPd	4,57	-
Tj = +12°C	Pdh	0,9	kW	Tj = +12°C	COPd	4,83	-
Tj = bivalent temperature	Pdh	5,1	kW	Tj = bivalent temperature	COPd	2,75	-
Tj = operation limit temperature	Pdh	5,1	kW	Tj = operation limit temperature	COPd	2,75	-
For air-to-water heat pumps: Tj = +15°C (if TOL < -20°C)	Pdh		kW	For air-to-water heat pumps: Tj = +15°C (if TOL < -20°C)	COPd		-
Bivalent temperature	T _{biv}	-10,0	°C	For air-to-water heat pumps: Operation limit temperature	TOL	-10,00	°C
Cycling interval capacity for heating	P _{cyh}		kW	Cycling interval efficiency	COP _{cyh}		-
Degradation co-efficient (**)	Cdh	1,0	-	Heating water operating limit temperature	WTOL	70,00	°C

Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0,009	kW	Rated heat output	P _{sup}	0	kW
Thermostat-off mode	P _{TO}	0,008	kW				
Standby mode	P _{SB}	0,008	kW				
Crankcase heater mode	P _{CK}	0,000	kW				
Type of energy input				electrical			

Other items				For air-to-water heat pumps: Rated air flow rate, outdoors			
Capacity control	variable			For water-/brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger			
sound power level, indoors/outdoors	L _{WA}	40/-	dB	1			m ³ /h
Emissions of nitrogen oxides	NO _x	-	mg/kWh				

For heat pump combination heater:							
Declared load profile	L			Water heating energy efficiency	η_{wh}	101	%
Daily electricity consumption	Q _{elec}	4,617	kWh	Daily fuel consumption	Q _{fuel}	0	kWh

Contact details: ait deutschland GmbH Industriestr. 3 95359 Kasendorf Germany

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating s

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model	WZSV 63H1/3M
Air-to-water heat pump: (yes/no)	no
Brine-to-water heat pump: (yes/no)	yes
Water-to-water heat pump: (yes/no)	no
Low-temperature heat pump: (yes/no)	no
Equipped with supplementary heater: (yes/no)	yes
combination heater with	yes
application: (low/medium)	low
climate: (colder/average/warmer)	average

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output	Prated	6	kW	Seasonal space heating energy efficiency	η_s	197,8	%
Declared coefficient of performance for part load at indoor temperature 20°C and outdoor temperature Tj				Declared coefficient of performance for part load at indoor temperature 20°C and outdoor temperature Tj			
Tj = -7°C	Pdh	5,4	kW	Tj = -7°C	COPd	4,03	-
Tj = +2°C	Pdh	3,3	kW	Tj = +2°C	COPd	5,20	-
Tj = +7°C	Pdh	2,0	kW	Tj = +7°C	COPd	5,95	-
Tj = +12°C	Pdh	1,0	kW	Tj = +12°C	COPd	6,04	-
Tj = bivalent temperature	Pdh	5,9	kW	Tj = bivalent temperature	COPd	3,79	-
Tj = operation limit temperature	Pdh	5,9	kW	Tj = operation limit temperature	COPd	3,79	-
For air-to-water heat pumps: Tj = +15°C (if TOL < -20°C)	Pdh		kW	For air-to-water heat pumps: Tj = +15°C (if TOL < -20°C)	COPd		-
Bivalent temperature	T _{biv}	-10,0	°C	For air-to-water heat pumps: Operation limit temperature	TOL	-10,00	°C
Cycling interval capacity for heating	P _{cyh}		kW	Cycling interval efficiency	COP _{cyh}		-
Degradation co-efficient (**)	Cdh	1,0	-	Heating water operating limit temperature	WTOL	70,00	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0,009	kW	Rated heat output	P _{sup}	0	kW
Thermostat-off mode	P _{TO}	0,008	kW	Type of energy input	electrical		
Standby mode	P _{SB}	0,008	kW				
Crankcase heater mode	P _{CK}	0,000	kW				
Other items							
Capacity control		variable		For air-to-water heat pumps: Rated air flow rate, outdoors			m ³ /h
sound power level, indoors/outdoors	L _{WA}	40/-	dB	For water-/brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	1		m ³ /h
Emissions of nitrogen oxides	NO _x	-	mg/kWh				
For heat pump combination heater:							
Declared load profile		-		Water heating energy efficiency	η_{wh}	-	%
Daily electricity consumption	Q _{elec}		kWh	Daily fuel consumption	Q _{fuel}	-	kWh
Contact details	ait deutschland GmbH Industriestr. 3 95359 Kasendorf Germany						

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating s

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.